

Yealink

Expansion PSTN Box CPN10 Quick Start Guide

PSTN box CPN10 is used to connect CP860 conference phones to the PSTN (Public Switched Telephone Network). It is a cost-effective solution for PSTN office. Up to 2 cascaded PSTN Boxes can be installed to an IP conference phone, which allows you to experience the local three-way conference conveniently in excellent speech quality with PSTN. You can also record the calls with a USB flash drive when using the PSTN box.

Packaging Contents



PSTN Box
CPN10



3m PSTN
Cable




Double-side
Tape



Quick Start Guide


Hardware Component Instructions

The following figure shows the primary hardware components of CPN10:




Installing the Expansion PSTN Box

Installing a PSTN box , as shown below:

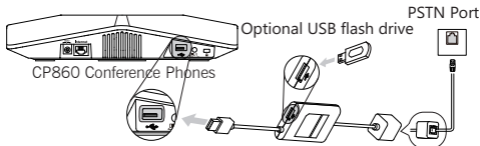

Note: USB flash drive should be purchased separately.

Installing two PSTN boxes for three-way local conference, as shown below:

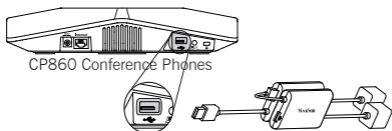





You can fix the two cascaded PSTN boxes by the double-side tape.

Configuring the PSTN Account



When one PSTN box is connected successfully, the LCD screen prompts "Connect PSTN1 Go to Setting?". When the second PSTN box CPN10 is connected successfully, the LCD screen prompts "Connect PSTN2 Go to Setting?".

Configuring the PSTN account:


1. Press the **OK** soft key to enter the Account setting screen.
2. (Optional.) Press  or  to select the desired PSTN account.
3. Press the **Enter** soft key.
4. Press  or  soft key to select **Enabled** or **Disabled** from the **Active Line** field.
5. (Optional.) Enter the string that will appear on the LCD screen in the **Label** field.
6. Press the **Save** soft key to accept the change.

PSTN account is also configurable at the path: **Menu** -> **Settings**-> **Advanced Settings** (default password: admin)-> **Accounts**.

Setting the default account:

1. Press **Menu**-> **Settings**-> **Advanced Settings** (default password: admin)-> **Accounts**.
2. Press  or  to select the desired PSTN account.
3. Press the **Default** soft key.

Viewing the PSTN Account Status

1. Press  when the phone is idle, and then press **More->Accounts.**

You can also press **Menu->Status->More->Accounts.**

The LCD screen displays the connected PSTN account status:

- Default Account
- Registered
- Unregistered
- Disabled

PSTN转接盒CPN10快速入门指南

PSTN转接盒CPN10实现了CP860会议话机与PSTN（公共交换电话网络）网络的自由连接，为只有PSTN接口的中小型会议室，提供高效便捷的解决方法。一台会议话机最多支持2个转接盒级联，你可以使用这种级联方式在PSTN网络中进行三方会议通话。PSTN转接盒带有U盘接口，你可以在通话中连接U盘进行录音。

包装清单



PSTN转接盒
CPN10



3米 PSTN 线




双面胶



快速入门指南


硬件介绍

CPN10主要硬件结构说明如下：




连接转接盒

连接PSTN转接盒，如下所示：

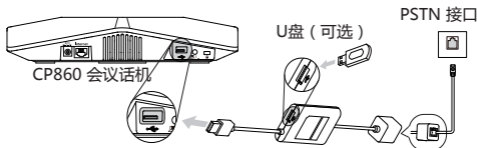

说明：U盘需要另外购买。

PSTN转接盒级联（实现PSTN三方会议），如下所示：

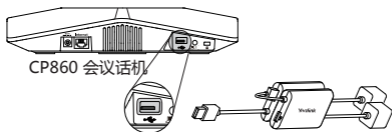





你可以使用附带的双面胶固定两个转接盒。

设置PSTN账号



PSTN转接盒连接成功后，话机液晶界面提示“连接PSTN1 进行设置？”。当第二个PSTN转接盒连接成功时，话机液晶提示“连接PSTN2 进行设置？”

设置PSTN账号：


1. 按**确定**软键进入账号设置界面。
2. (可选项) 按  或  选择相应的PSTN账号。
3. 按**进入**软键。
4. 按  或  从**账号状态**区域中选择**启用**或**禁用**。
5. (可选) 在**标签**区域中输入显示在液晶界面的标签。
6. 按**保存**软键保存操作。

PSTN账号配置也可以通过路径：**菜单->设置->高级设置** (默认密码：admin) -> **账号**。

设置默认账号：

1. 按**菜单->设置->高级设置**(默认密码：admin)-> **账号**。
2. 按  或  选择相应的PSTN账号。
3. 按**默认**软键。

查看PSTN账号状态

1. 在待机界面按  , 然后按**更多->账号**。

你也可以按**菜单->状态->更多->账号**。

话机液晶界面显示已连接的PSTN账号状态：

- 默认账号
- 注册上
- 注册失败
- 禁用